

# ASSEMBLY AND USE GUIDE FOR PET CRATE TABLE



Thank you for selecting a quality handcrafted hardwood Pet Crate Table distributed by Crown Pet Products, Inc.

Your crate is designed for easy assembly and will require a Phillips Head manual or power screwdriver and an Allen Wrench that is provided. If you have any problems do hesitate to contact us at 239-558-5120.

Before starting to assembly your crate be sure you have all the parts.

Crate Side Panel **Qty. 2**



Crate Rear Panel **Qty. 1**



Crate Top **Qty. 1**



Crate Bottom **Qty. 1**



Crate Front **Qty. 1**



Machine Screws (medium crate) **Qty. 4**

Machine Screws (large crate) **Qty. 6**

Wood Screws (medium crate) **Qty. 12**

Wood Screws (large crate) **Qty. 18**

## Use and Proper Care



1. Use this product only for the intended use.
2. Do not stand or sit on the crate as it may result in fall or injury
3. To clean the finish on your crate use mild soap. Furniture polish, Pledge or End Dust can be used to keep finish looking great. Do not use chemicals or harsh abrasives on the finish it could result in damage.
4. Use crate on a flat, level surface.
5. This crate is not intended for pets that chew.

### Step 1

Place a cover or blanket on a table to protect crate finish. Place the rear panel on table with grooves facing up. Place crate bottom dowels into holes in rear panel and secure with 3 screws.



### Step 2

Place left side panel into groove and over dowel pins and secure with 3 screws (medium) and 6 screws (large). Do not over tighten.



### Step 3

Place right side panel into groove and over dowel pins and secure with 3 screws (medium) and 6 screws (large). Do not over tighten.




### Step 4

Place front panel with door over dowel pins and align grooves over side panels. Secure with 3 screws. Do not over tighten.



### Step 5

Hold Front and Rear panels against side panels while moving crate to right side up position with glide feet on the table top. Note 4 dowels-- 2 in front panel and 2 in the rear panel. Find dowel holes on the bottom side of crate top.

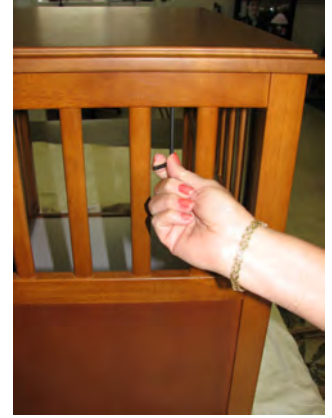

Place top on to the 4 dowels. With the Allen Wrench provided install the Allen head machine screws through holes on front panel and tighten, then do the same on the rear panel. Note 2 screws each end (medium) and 3 screws each end (Large)

### Step 6

The crate is fully assembled and it is ready to use.

